


Design and dimensions shown may be changed without prior notice

// 9670E

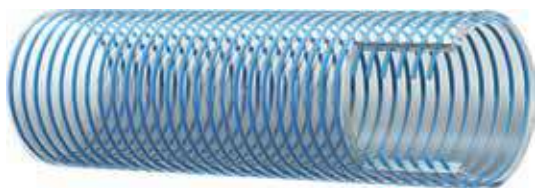

**Fish handling - PVC - Super elastic**

**Construction:** transparent PVC - abrasion and ozone resistant.  
**Reinforcement:** light blue shock resistant rigid PVC.  
**Application:** fish transfer on fish farms.  
**Constant operation:** -20 °C +60 °C (-4 °F +140 °F)

↔		↔		↻		↻		⤴		⚖		
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
152,0	6"			2	30	6	90	380,0	14,96	95	5,600	3,77
203,0	8"			2	30	6	90	609,0	23,98	95	9,200	6,19
254,0	10"			2	30	6	90	1016,0	40,00	95	14,500	9,75
305,0	12"			1	15	3	45	1525,0	60,04	95	19,000	12,77

// 949AA



**Fish pump 3 bar (45 psi)**

**Tube:** black NBR - oil, abrasion and sea water resistant.  
**Reinforcement:** high tensile textile cords.  
**Cover:** black conductive CR - oil, abrasion, ozone and sea water resistant.  
**Application:** fish transfer from fishing net to ship deck.  
**Constant operation:** -30 °C +80 °C (-22 °F +176 °F)

↔		↔		↻		↻		⤴		⚖		
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
254,0	10"	262,00	10,31	3	45	10	150				4,800	3,23
305,0	12"	313,00	12,32	3	45	10	150				5,740	3,86
355,0	14"	367,00	14,45	3	45	10	150				9,020	6,07
406,0	16"	418,00	16,46	3	45	10	150				10,890	7,32
457,0	18"	469,00	18,46	3	45	10	150				12,380	8,32
508,0	20"	522,00	20,55	3	45	10	150				14,330	9,64