

Design and dimensions shown may be changed without prior notice

// 642AA

**Rig supply soft wall - Fuel-liquid mud 27 bar (400psi)****Tube:** black conductive NBR.**Reinforcement:** high tensile textile cords - antistatic wire**Cover:** black conductive CR - abrasion, ozone, hydrocarbon and fire resistant.**Application:** fuel, oil and liquid mud transfer between supply vessels and offshore platforms.

Also suitable for sea water pumping and barite transfer.

Tensile end load resistance:

ID ≥ 4" 10.000 kg.

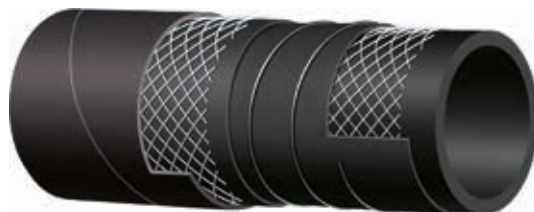
Electrically continuous.

Also available in self floating version.

Temperature: -30 °C +90 °C (-22 °F +194 °F)

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	Weight (kg/m)	Weight (lb/ft)
102,0	4"	120,0	4,72	27	400	108	1566	4,410	2,97
127,0	5"	149,0	5,87	27	400	108	1566	6,260	4,21

// 622AA

**Rig supply hard wall - Fuel-liquid mud****Tube:** black conductive NBR.**Reinforcement:** high tensile textile cords with embedded steel helix wire - antistatic wire**Cover:** black conductive CR - abrasion, ozone, hydrocarbon and fire resistant.**Application:** fuel, oil and liquid mud transfer between supply vessels and offshore platforms.

Also suitable for sea water pumping and barite transfer.

Tensile end load resistance:

ID 3" 6.000 kg

ID ≥ 4" 10.000 kg.

Electrically continuous.

Also available in self floating version.

Temperature: -30 °C +90 °C (-22 °F +194 °F)

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Vacuum %	Weight (kg/m)	Weight (lb/ft)
76,0	3"	98,0	3,86	40	600	160	2320	380	14,96	90,00	4,990	3,36
102,0	4"	128,0	5,04	40	600	160	2320	510	20,08	90,00	7,600	5,11
127,0	5"	157,0	6,18	35	525	140	2000	635	25,00	90,00	9,970	6,71

ABS Type approved hose assemblies.