
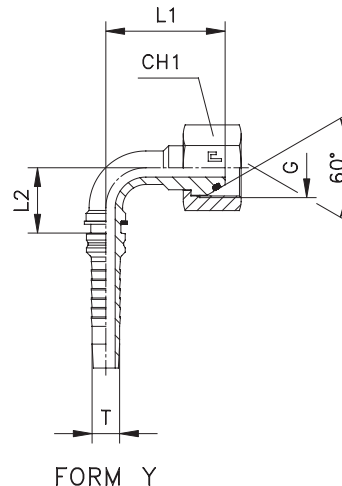


## 90° ELBOW THURST-WIRE/SLIP-ON NUT - 60° CONE WITH O-RING - ISO 8434-6 (BS 5200)

Thread BSP Parallel

Code: **8072.. INTERLOCK**  
Type: **DKOR90**

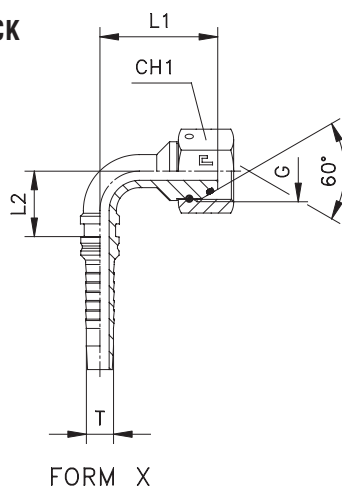



| CODE   | I.D. hose T |      |       | G     | FORM | L1   | L2    | CH1 | PN [bar] |
|--------|-------------|------|-------|-------|------|------|-------|-----|----------|
|        | DN          | size | INCH  |       |      |      |       |     |          |
| 807201 | 19          | -12  | 3/4   | 3/4   | X    | 55   | 52    | 32  | 315      |
| 807202 | 25          | -16  | 1     | 1     | X    | 70   | 68    | 41  | 250      |
| 807203 | 25          | -16  | 1     | 1 1/4 | Y    | 72,5 | 68    | 50  | 200      |
| 807204 | 31          | -20  | 1 1/4 | 1 1/4 | Y    | 83   | 81    | 50  | 200      |
| 807205 | 38          | -24  | 1 1/2 | 1 1/2 | Y    | 99   | 105   | 55  | 160      |
| 807206 | 51          | -32  | 2     | 2     | X    | 127  | 142,5 | 70  | 125      |

**Notes:** If you wish to order a fitting in stainless steel, please change the first two digit from **80....** to **81....** .

## 45° ELBOW THURST-WIRE/SLIP-ON NUT - 60° CONE WITH O-RING (BS 5200)

Thread BSP Parallel

Code: **8073.. INTERLOCK**  
Type: **DKOR45**

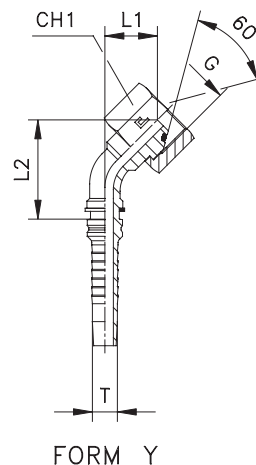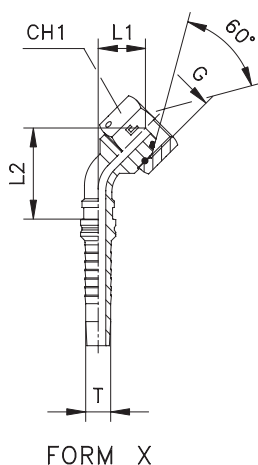

| CODE   | I.D. hose T |      |       | G     | FORM | L1   | L2    | CH1 | PN [bar] |
|--------|-------------|------|-------|-------|------|------|-------|-----|----------|
|        | DN          | size | INCH  |       |      |      |       |     |          |
| 807301 | 19          | -12  | 3/4   | 3/4   | X    | 27,5 | 83,5  | 32  | 315      |
| 807302 | 25          | -16  | 1     | 1     | X    | 34,5 | 109,5 | 41  | 250      |
| 807303 | 25          | -16  | 1     | 1 1/4 | Y    | 36,5 | 111,5 | 50  | 200      |
| 807304 | 31          | -20  | 1 1/4 | 1 1/4 | Y    | 39   | 129,5 | 50  | 200      |
| 807305 | 38          | -24  | 1 1/2 | 1 1/2 | Y    | 46   | 163   | 55  | 160      |
| 807306 | 51          | -32  | 2     | 2     | X    | 57,5 | 215,5 | 70  | 125      |

**Notes:** If you wish to order a fitting in stainless steel, please change the first two digit from **80....** to **81....** .