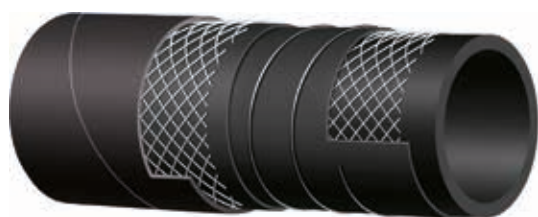


// 715AA

**Rig supply hard wall - Bulk material 20 bar (300 psi)**

Tube: black conductive NR - abrasion resistant.

Reinforcement: high tensile textile cords with embedded steel helix wire - antistatic wire.

Cover: black conductive CR- abrasion, ozone, hydrocarbon and fire resistant.

Application: bulk material, barite and dry cement transfer from supply vessels to offshore platforms.

Reserve buoyancy calculated according to GMPHOM 2009 standard. Tensile end load resistance:

ID 4" 7.000 kg

ID 5" 10.000 kg. Electrically continuous.

Also available in self floating version.

Temperature: -30 °C +80 °C (-22 °F +176 °F)

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Vacuum %	Weight (kg/m)	Weight (lb/ft)
102,0	4"	124,0	4,88	20	300	80	1200	510	20,08	90,00	6,080	4,09
127,0	5"	151,0	5,94	20	300	80	1200	635	25,00	90,00	8,460	5,69

ABS Type approved hose assemblies.

// RIGMASTER WATER S&D

**Water - glycole S&D 10 bar (150 psi)**

Tube: black conductive EPDM.

Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: black conductive EPDM - abrasion and ozone resistant.

Application: water and seawater suction and delivery in offshore applications.

Also available in self floating version.

Temperature: -40 °C +100 °C (-40 °F +212 °F) depending on conveyed chemical.

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	BP (psi)	BP (bar)	WP (psi)	BR (mm)	BR (in)	Vacuum %	Weight (kg/m)	Weight (lb/ft)
102,0	4"	116,0	4,57	10	450	30	150	408	16,06	90,00	3,330	2,24

// RIGMASTER HD WATER S&D

**Water - glycole S&D 20 bar (300 psi)**

Tube: black conductive EPDM.

Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: black conductive EPDM - abrasion and ozone resistant.

Application: water and seawater suction and delivery in offshore applications.

Also available in self floating version.

Temperature: -40°C +100°C (-40°F +212°F) depending on conveyed chemical.

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Vacuum %	Weight (kg/m)	Weight (lb/ft)
102,0	4"	116,0	4,57	20	300	60	900	408	16,06	90,00	3,310	2,23