


MPC10-EPDM

Multipurpose EPDM - 10 bar

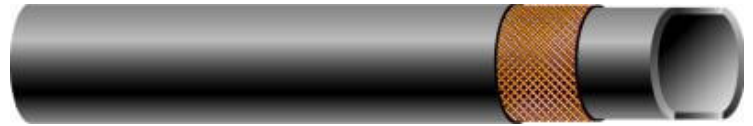

SPECIFICATIONS

Application	Highly flexible multi-purpose hose, with very good ageing, weather and abrasion resistance.
Feature	EPDM tube and cover resistant to heat, sunlight, ozone and weather. Kink resistant due to textile reinforcement.
Temperature range	-40°C / +100°C, for a short time up to +120°C.
Safety factor	3 : 1
Tube	EPDM, black, electrically conductive, smooth.
Reinforcement	Textile spiral.
Cover	EPDM, black, resistant to ozone and weather, electrically conductive, smooth.
Marking	continuous inkjet, white letters: "SEMPERIT (S) MPC10-EPDM MULTI PURPOSE PN 10 BAR -40°C / +100°C short time +120°C Made in EU".

TECHNICAL DETAILS

Article number	Internal-Ø		Wall width	External-Ø	Work. pressure [max.]	Number of inserts	Bending radius [min.]	Weight approx.	Coil length [max.]
	mm	inch	mm	mm	bar		mm	kg/m	m
68121 1030	10.0	3/8	3.0	16.0	10	2	60	0.22	50
68121 1035	10.0	3/8	3.5	17.0	10	2	60	0.22	50
68121 1335	13.0	1/2	3.5	20.0	10	2	80	0.34	50
68121 1540	15.0		4.0	23.0	10	2	90	0.37	50
68121 1635	16.0	5/8	3.5	23.0	10	2	100	0.40	50
68121 1935	19.0	3/4	3.5	26.0	10	2	120	0.53	50
68121 2545	25.0	1	4.5	34.0	10	2	150	0.67	50