


STRAIGHT MALE - CONE 24° - ISO 8434-1 (DIN 2353)

Metric parallel thread

Code: **8060.. INTERLOCK**

Type: **CEL/GES**

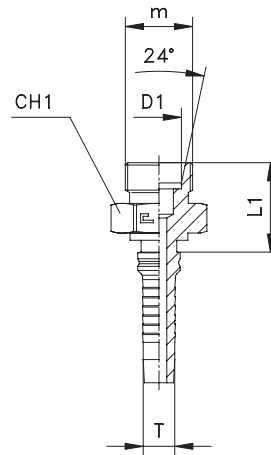

CODE	I.D. hose T			24° cone D1	m	L1	CH1	PN [bar]
	DN	size	INCH					
806001	19	-12	3/4	20S	30x2	34,5	32	400
806002	19	-12	3/4	25S	36x2	38,5	41	400
806003	25	-16	1	25S	36x2	39	41	380
806004	25	-16	1	30S	42x2	41	46	380
806005	31	-20	1 1/4	38S	52x2	48,5	55	315


Notes: If you wish to order a fitting in stainless steel, please change the first two digit from **80....** to **81.....** .

STRAIGHT SLIP-ON NUT - 24° CONE WITH O-RING - ISO 8434-1 (DIN 2353)

Metric parallel thread

Code: **8061.. INTERLOCK**

Type: **DKOS**

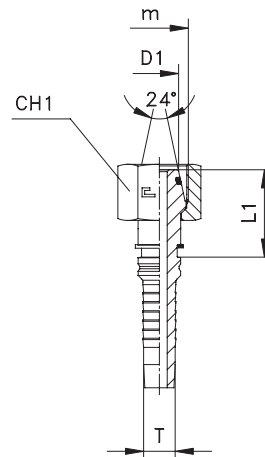

CODE	I.D. hose T			24° cone D1	m	L1	CH1	PN [bar]
	DN	size	INCH					
806101	19	-12	3/4	20S	30x2	34,5	36	400
806102	19	-12	3/4	25S	36x2	36,5	46	400
806103	25	-16	1	25S	36x2	37	46	380
806104	25	-16	1	30S	42x2	40	50	380
806105	31	-20	1 1/4	38S	52x2	45,5	60	315

Notes: If you wish to order a fitting in stainless steel, please change the first two digit from **80....** to **81.....** .