


90° ELBOW THURST-WIRE/SLIP-ON NUT - JIC 74° CONE - ISO 8434-2 (SAE J514)


UNF/UN-2B thread BSP taper thread

Code: **8066.. INTERLOCK**

Type: **DKJ90**

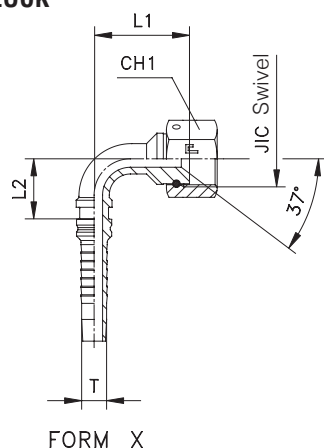

FORM X

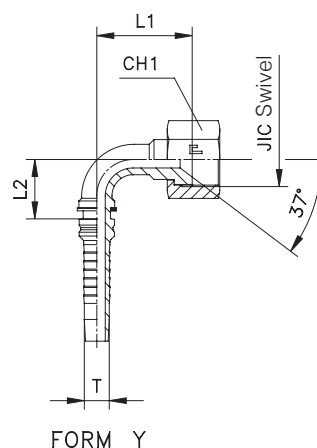

FORM Y

CODE	I.D. hose T			JIC 37°	FORM	L1	L2	CH1	PN [bar]
	DN	size	INCH						
806601	19	-12	3/4	11/16-12	X	51	51,5	32	350
806602	19	-12	3/4	13/16-12	Y	49,5	52,5	36	290
806603	19	-12	3/4	15/16-12	Y	51	52,5	41	290
806604	25	-16	1	15/16-12	X	62,5	69	41	290
806605	25	-16	1	15/8-12	Y	62	67	50	240
806606	31	-20	1 1/4	15/8-12	X	80	81	50	240
806607	31	-20	1 1/4	17/8-12	Y	80	81	60	240
806608	38	-24	1 1/2	17/8-12	X	97,5	105,5	60	240
806609	51	-32	2	2 1/2-12	X	123,5	142,5	75	100


Notes: If you wish to order a fitting in stainless steel, please change the first two digit from **80....** to **81....** .

45° ELBOW THURST-WIRE/SLIP-ON NUT - JIC 74° CONE - ISO 8434-2 (SAE J514)


UNF/UN-2B thread

Code: **8067.. INTERLOCK**

Type: **DKJ45**

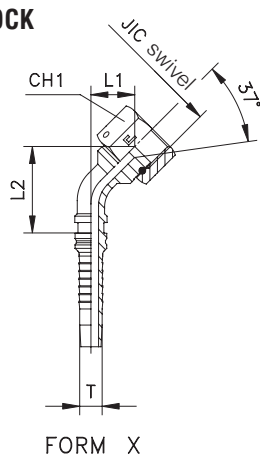

FORM X

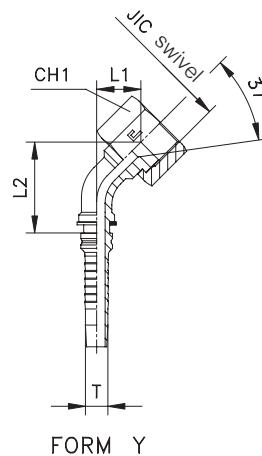

FORM Y

CODE	I.D. hose T			JIC 37°	FORM	L1	L2	CH1	PN [bar]
	DN	size	INCH						
806701	19	-12	3/4	11/16-12	X	25	84,5	32	350
806702	19	-12	3/4	13/16-12	Y	24	82	36	290
806703	19	-12	3/4	15/16-12	Y	25	83	41	290
806704	25	-16	1	15/16-12	X	29,5	104,5	41	290
806705	25	-16	1	15/8-12	Y	29	104	50	240
806706	31	-20	1 1/4	15/8-12	X	36,5	127,5	50	240
806707	31	-20	1 1/4	17/8-12	Y	37	127,5	60	240
806708	38	-24	1 1/2	17/8-12	X	45	162,5	60	240
806709	51	-32	2	2 1/2-12	X	55	213	75	100

Notes: If you wish to order a fitting in stainless steel, please change the first two digit from **80....** to **81....** .